



GENERAL SPEC.

Hold-up Time	17ms@max. load 115Vac/60Hz & 230Vac/50Hz
Dimensions	150 x 150 x 86 (mm)
MTBF	275K ⁺ hrs
Output Rise Time	0.1~20ms
PG Signal Rise Time	10ms max.

ENVIRONMENTAL SPEC.

Operating Temperature	0 ~ 50°C
Storage Temperature	-40 ~ 70°C

OUTPUT CURRENT CAPACITY

Voltage	Regulation	Min. Load	Max. Load	Combined
+5V	4.75~5.25	0.1A	25A	133W
+3.3V	3.13~3.46	0.1A	25A	
+12V1	11.4~12.6	0.1A	19A	624W
+12V2	11.4~12.6	0.1A	19A	
+12V3	11.4~12.6	0.1A	19A	
+12V4	11.4~12.6	0.1A	19A	
-12V	-10.8~-13.2	0A	0.5A	6W
+5Vsb	4.75~5.25	0.05A	3A	15W

MODEL SELECTION

Part Number	PFC	Input Voltage
API7063	Active PFC	110~240Vac

FEATURES

- Dual Switch Forward Converter design
- 3.3V & 5V DC-DC VRM module - increase efficiency
- Super low noise
- Scratch-resistant wrinkle paint casing
- Compliance with 80 PLUS Silver - efficiency 85%, 88%, 85%
- Support multi-GPU SLI & Crossfire
- Intelligent-thermal fan control
- Overclocking capability

INPUT SPEC.

Input Voltage Range	110~240Vac
Input Frequency Range	50~60Hz
Leakage Current	3.5mA@120V/60Hz
AC Input Current	12A@90V
PFC (Harmonic)	Meet EN61000-3-2 Class D (100V & 230V/50Hz)
EMI/RFI	CISPR 22 Class B
Energy Star	Efficiency 50% ⁺ @1W standby mode, 115V/50Hz


OUTPUT SPEC.

Rated Power	700W
Efficiency	85% ⁺ @20%, 88% ⁺ @50%, 85% ⁺ @100% loads
OVP	+3.3V:4.5V,+5V:7V,+12V1/V2/V3/V4:16V
OCV	+3.3V:45A,+5V:45A,+12V1/V2/V3/V4:35A
OTP	Latch off all main outputs if over temperature
SCP	Latch off all main outputs reset by cycling on/off control or AC power

SAFETY

UL, CUL, FCC, TUV, NEMKO, CB, CE, CCC, BSMI, C-Tick, MIC

OUTLINE DRAWING

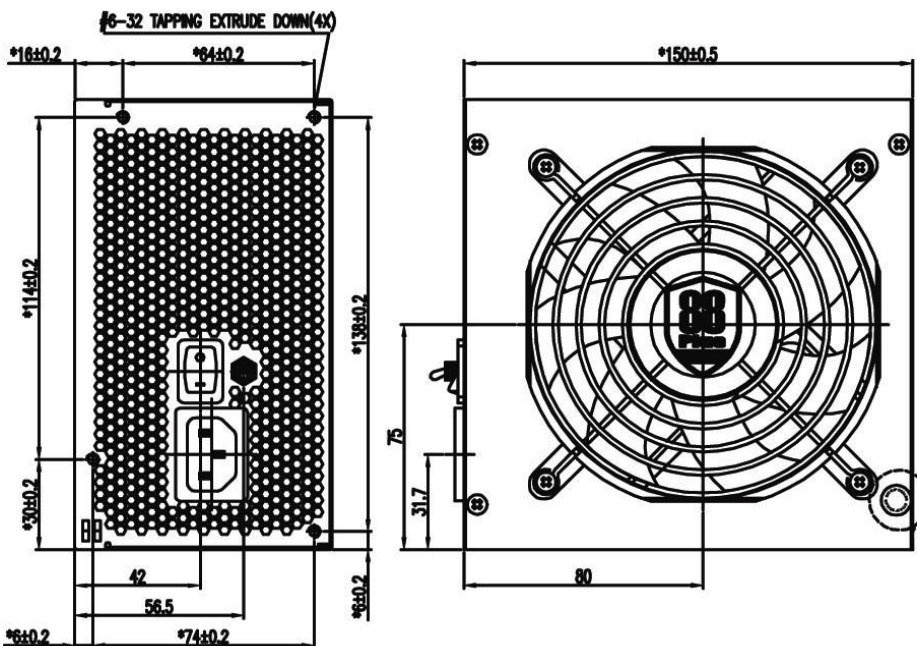

- Cabling:**
- 24pin for M/B x 1
 - 4+4pin for CPU x 1
 - Peripheral 4pin x 5
 - FDD 4pin x 1
 - SATA x 10
 - PCI-E 6+2pin x 4